




Line Input Transformer
1:1.414 FOR 'BALANCED BRIDGING' INPUTS

- Ideal for balancing vacuum tube input stages
- Wide bandwidth: -3 dB at 0.20 Hz and 80 kHz
- Recommended for input levels up to 5Vrms at 20 Hz
- Very Low Distortion: 0.03% at 20Hz and 1Vrms
- High common-mode rejection: 95 dB at 60 Hz



This transformer is designed for use in wideband line input stages. Distortion remains very low and CMRR remains high, even when driven by high source impedances. The primary is fully balanced and its leads may be reversed to invert polarity, if required. A 30 dB magnetic shield package is standard.


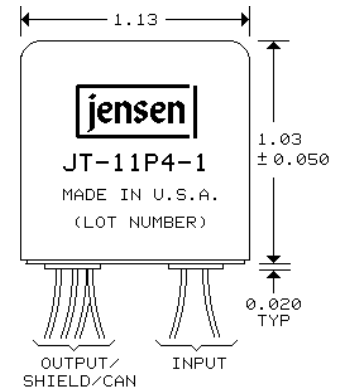


#30 AWG (7x38) UL STYLE 1061 COLOR CODED WIRE LEADS, 8" MINIMUM LENGTH

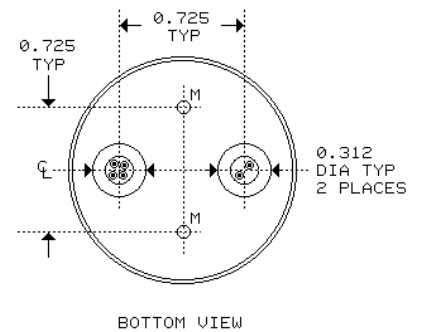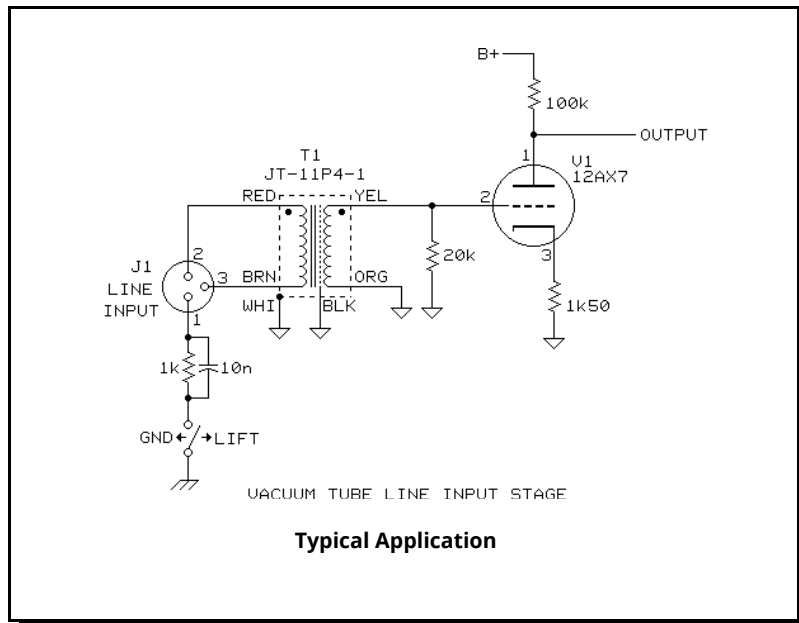

USE ONLY #4 TYPE B SELF TAPPING SCREWS IN HOLES "M". ALLOW NO MORE THAN 0.15" PENETRATION INTO TRANSFORMER HOUSING.

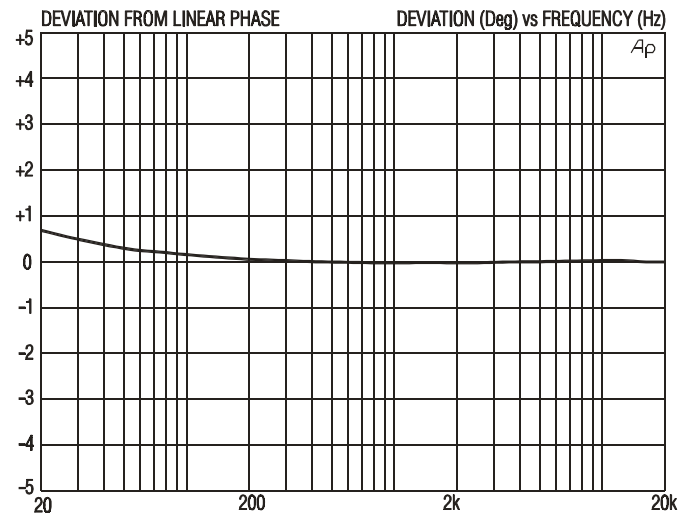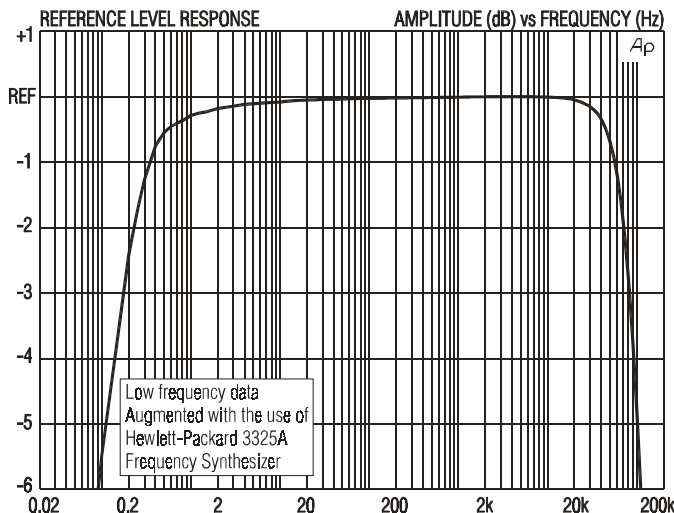


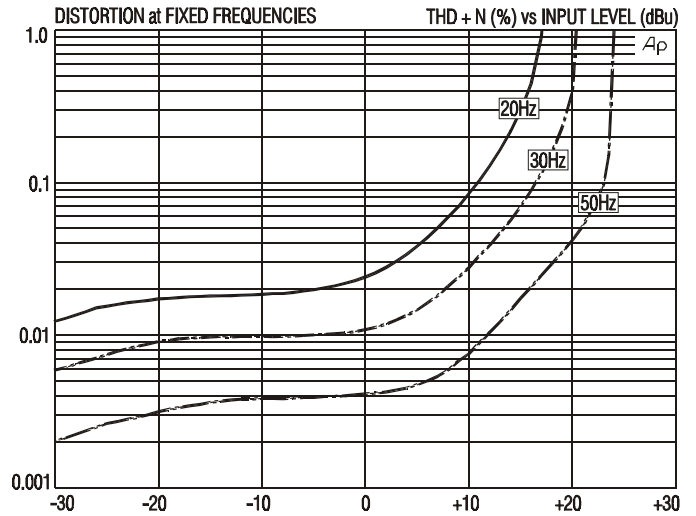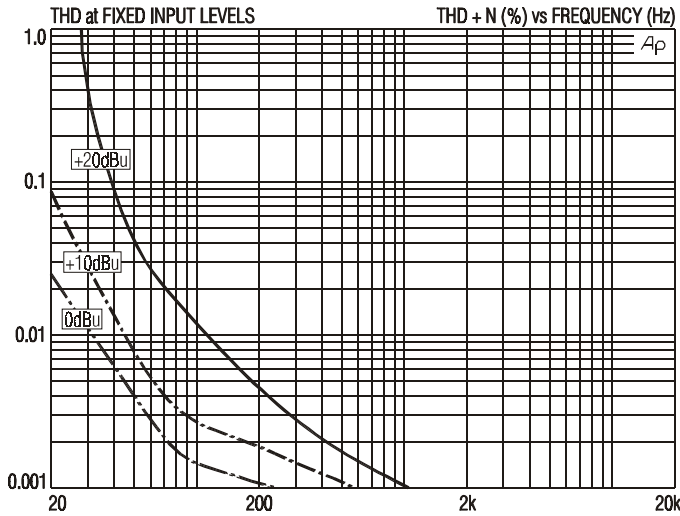


JT-11P4-1 SPECIFICATIONS (all levels are input unless noted, $R_s = 600 \Omega$ unless noted)

PARAMETER	CONDITIONS	MINIMUM	TYPICAL	MAXIMUM
Input impedance, Z_i	1 kHz, +4 dBu, test circuit 1	11.3 k Ω	11.8 k Ω	12.3 k Ω
Voltage gain	1 kHz, +4 dBu, test circuit 1	1.40 dB	1.50 dB	1.60 dB
Magnitude response, ref 1 kHz	20 Hz, +4 dBu, test circuit 1	-0.15 dB	-0.05 dB	0.0 dB
	20 kHz, +4 dBu, test circuit 1	-0.15 dB	-0.05 dB	0.0 dB
Deviation from linear phase (DLP)	20 Hz to 20 kHz, +4 dBu, test circuit 1		$\pm 0.5^\circ$	$\pm 2.0^\circ$
Distortion (THD)	1 kHz, 0 dBu, test circuit 1		<0.001%	
	20 Hz, 0 dBu, test circuit 1		0.025%	0.10%
Maximum 20 Hz input level	1% THD, test circuit 1	+14 dBu	+16 dBu	
Common-mode rejection ratio (CMRR) 50 Ω balanced source	60 Hz, test circuit 2		95 dB	
	3 kHz, test circuit 2	65 dB	75 dB	
Common-mode rejection ratio (CMRR) 600 Ω unbalanced source	60 Hz, test circuit 3		95 dB	
	3 kHz, test circuit 3		65 dB	
Output impedance, Z_o	1 kHz, test circuit 1, $R_s=50 \Omega$		3.36 k Ω	
DC resistances	primary (RED to BRN)		1.00 k Ω	
	secondary (YEL to ORG)		1.93 k Ω	
Capacitances @ 1 kHz	primary to shield and case		105 pF	
	secondary to shield and case		65 pF	
Turns ratio		1:1.412	1:1.414	1:1.416
Temperature range	operation or storage	0 $^\circ$ C		70 $^\circ$ C
Breakdown voltage (see IMPORTANT NOTE below)	primary or secondary to shield and case, 60 Hz, 1 minute test duration	250 V RMS		


IMPORTANT NOTE: This device is NOT intended for use in life support systems or any application where its failure could cause injury or death. The breakdown voltage specification is intended to insure integrity of internal insulation systems; continuous operation at these voltages is NOT recommended. Consult our applications engineering department if you have special requirements.

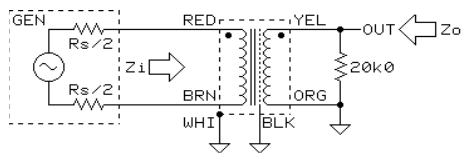

TEST CIRCUIT 1

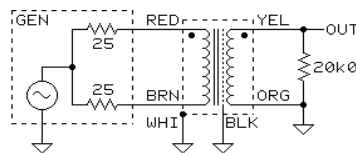

TEST CIRCUIT 2

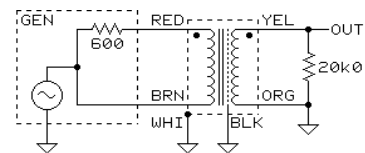

TEST CIRCUIT 3

All minimum and maximum specifications are guaranteed. Unless noted otherwise, all specifications apply at 25 $^\circ$ C. Specifications subject to change without notice. All information herein is believed to be accurate and reliable, however no responsibility is assumed for its use nor for any infringements of patents which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Jensen Transformers, Inc.